

The photograph may not match the reference exactly. Please read the product description to identify the finish.

TECHNICAL CHARACTERISTICS



Product Model:	T-101LED50-18T1	T-101LED50-18T3A
IP Protection degrees:	IP65	
IK Protection degrees:	IK08	
Light source:	18 x LUXEON 5050	
Total power consumption:	50W	50W
Luminous Flux:	6750Lm	6250Lm
Luminous efficiency:	135Lm/w	125Lm/w
Color temperature:	4000K as standard. Optimal 2700K, 3000K & 5700K. Amber LED available	
Voltage/Frequency:	100-240V/50-60Hz	
Warranty(Years):	5	
Units per box:	1	
Net Weight(Kg)	H270: 20.4KG / H350: 24.0KG	



MATERIALS / FINISHES

Structure material: High purity aluminium	diffuser material: PC diffuser
Structure finish: Black	Diffuser finish: Matt

GEAR

Multi-voltage electronic gear included (100-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

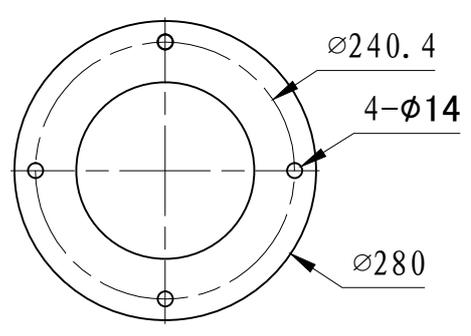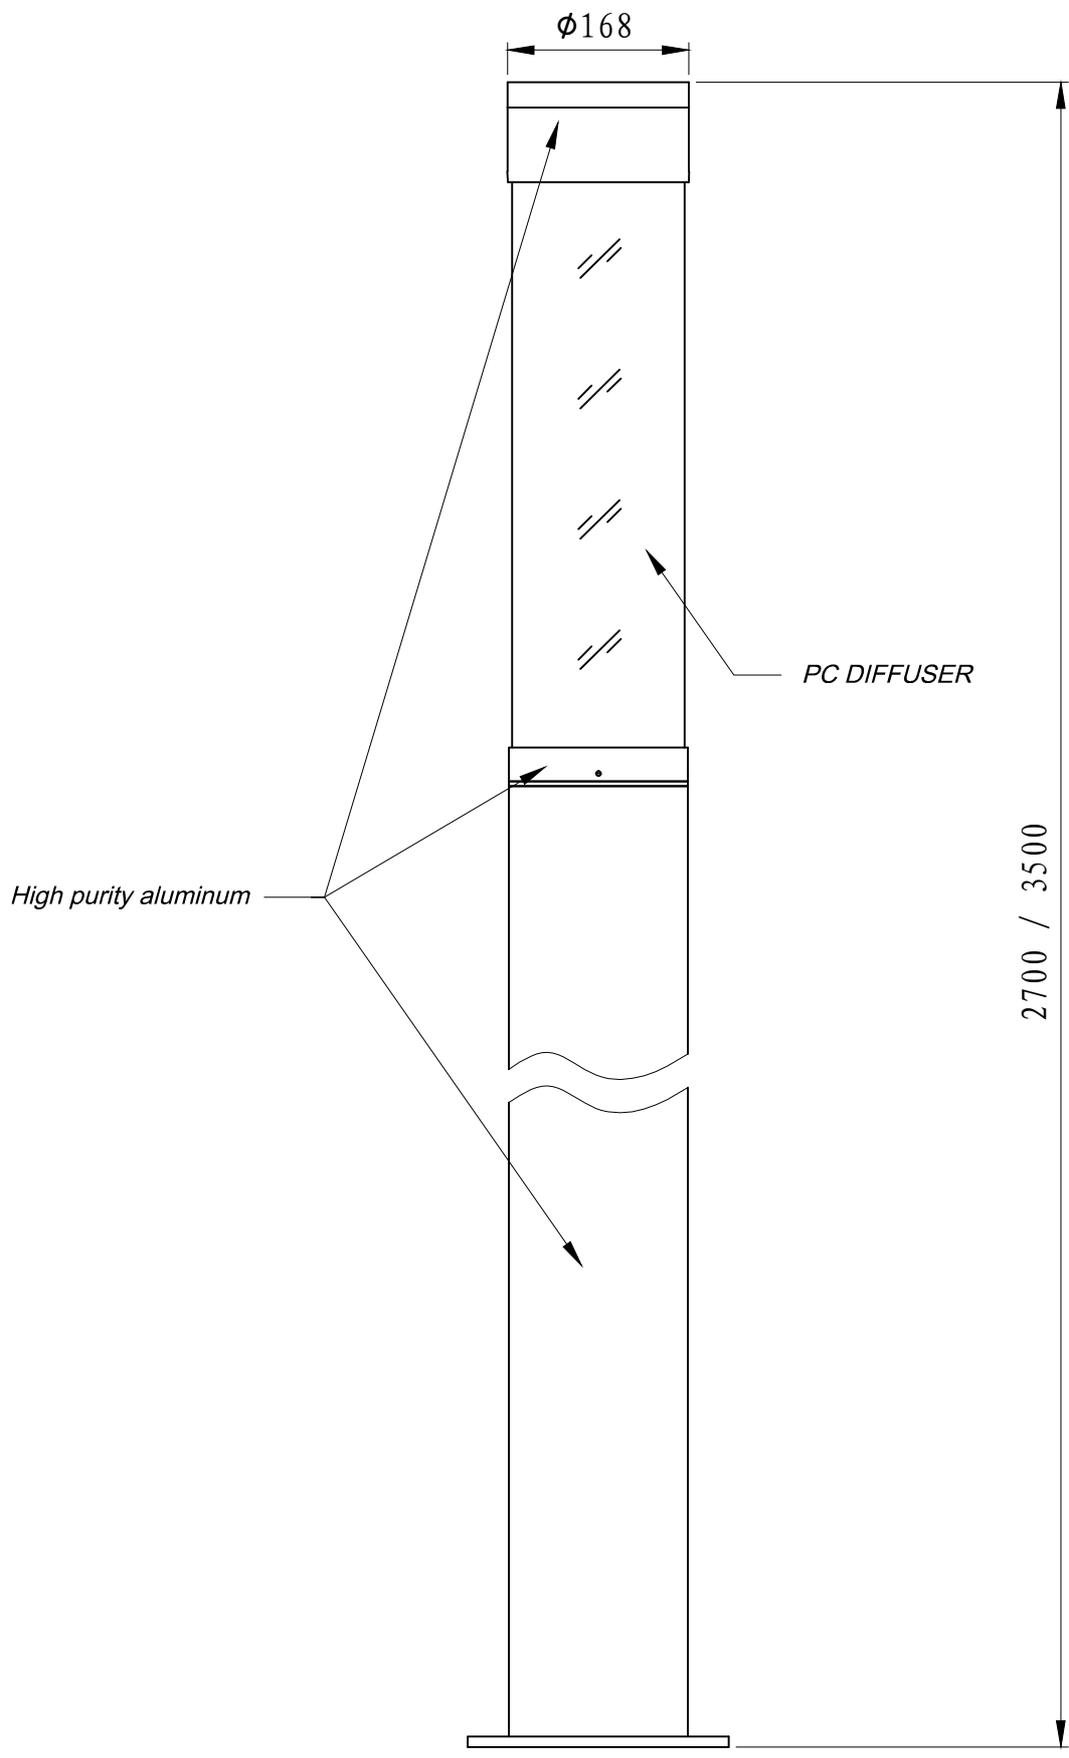

OUTDOOR

