




The photograph may not match the reference exactly. Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

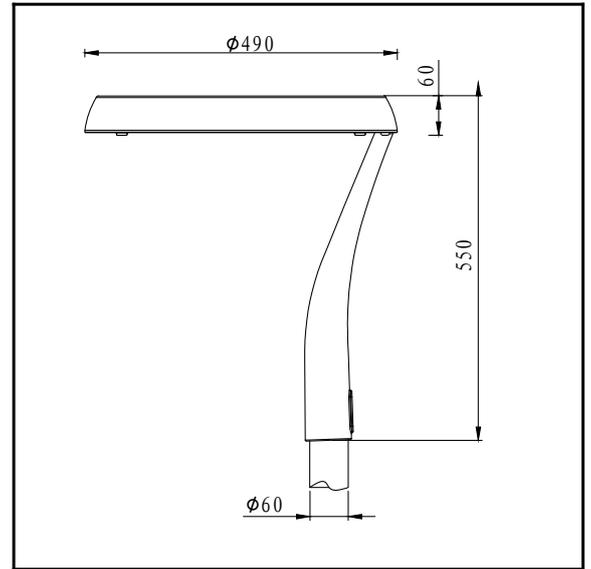

Product Model:	T-191PSLED12-24
IP Protection degrees:	IP66
IK Protection degrees:	IK08
Light source:	24 x SMD 3030
Total power consumption:	12W
Luminous Flux:	1320Lm
Luminous efficiency:	110Lm/w
Color temperature:	4000K as standard. Optinal 2700K,3000K & 5700K. Amber LED available
Warranty(Years):	5
Units per box:	1
Net Weight(Kg)	10.5

Full charged under sunshine need 3days.
Then can be working 3days night

MATERIALS / FINISHES

Structure material: High purity aluminium	aiffuser material: Glass
Structure finish: Silver	Diffuser finish: Transparent

GEAR

Multi-voltage electronic gear included (100-240 V / 50-60 Hz)

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.

